

# Wireless

## 3920 Series Analog and Digital Radio Test Platform



Featuring Advanced P25  
Signal Analysis

New Generation PMR Test Platform

- 1 GHz Frequency Range standard
- 2.7 GHz Frequency Range available
- Sensitive receiver with built in pre-amp for off air measurements
- Low DANL Spectrum Analyzer with 8 markers
- Tracking generator
- IQ Generator
- Color coded Pass/Fail results
- Remote site monitoring application
- GPIB, Ethernet, USB and RS-232 interfaces
- Color display
- Software upgradeable in the field
- High performance FM/AM/SSB analog duplex features
- HP/Agilent 8920B remote emulation
- EIA/TIA-603 Land mobile radio test software
- P25 advanced parametric/protocol analysis
- P25 Trunking
- SmartNet™/SmartZone™ Trunking
- Automatic alignment for Motorola ASTRO® radios
- HPD® (High Performance Data) base and mobile simulation

- TETRA mobile, base station and DMO tests
- DMR (MOTOTRBO™)
- NXDN™
- dPMR
- ARIB STD-T98

The 3920 is the latest Radio Test Solution from Aeroflex for engineering, production and field service applications. The instrument provides a comprehensive range of general purpose analog measurement facilities as well as advanced digital test options for P25, TETRA, HPD®, NXDN™, dPMR, DMR and T98 systems.


### Standard features include:

- Full AM, FM and SSB test capabilities
- 5 MHz channel spectrum analyzer
- Full Span spectrum analyzer to 2.7 GHz (with option 392XOPT058)
- Dual-Channel oscilloscope to 4 MHz
- Full audio analysis for AF level, frequency, SINAD and distortion measurements
- Full RF parametric tests for power, frequency error, deviation (FM) and modulation index (AM)
- Three high accuracy audio modulators/function generators
- Three high accuracy audio baseband generators
- DTMF and DCS generators
- DTMF and DCS decode
- Encode and decode of tone remote, two tone sequential, and 5/6 tone formats
- Variable notch SINAD, distortion and SNR meters
- Color coded Pass/Fail meter functions for fast test capabilities
- Accurate broad band and in band power meters

The digital architecture of the 3920 delivers faster, accurate and more repeatable measurements than any of its predecessors and provides for future technology enhancements as new digital technology becomes available.

Combining the power of an onboard PC with a 30 GB hard-drive and Linux OS, the 3920 also supports USB mouse and keyboard interface for very easy operation as well as almost unlimited save/recall setups, saving time and effort.

The 3920 features easy to read meters with Pass/Fail color coding for instant Go/NoGo testing. With these easy to configure meters, the user can set up unique Pass/Fail parameters for each radio type that is being tested. When used with the save/recall locations, this allows for instant recall of the test parameters so semi-technical or non-technical individuals can simply key the radio and test. The meters will display "Green" for good, "Red" for high and "Blue" for low. A quick glance and the operator will know that the radio is within established test parameters.

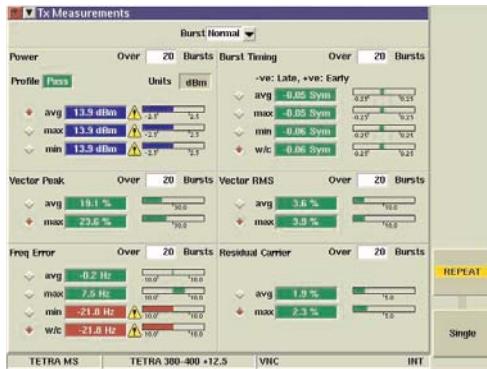

*Tx Measurements Tile Maximized, Showing Green, Red and Blue Indications*

The 3920 provides a flexible platform for almost any application. Each of the modes of operations can be enhanced with optional applications and features. In addition, optional system personalities allow the 3920 to be completely reconfigured "on the fly" to provide advanced tests for analog and digital systems.

#### High Performance Standard Features:

**Wide Frequency Range:** The 3920 includes two variants. The 3920 comes standard with continuous frequency coverage from 10 MHz (usable down to 100 kHz) to 1 GHz. Option 392XOPT058 extends the maximum frequency to 2.7 GHz.

**Broadband RF Power:** Direct input of signal power of up to 125 W is supported, making the 3920 compatible with virtually all practical requirements for mobile terminal and base station test.

**Inband Low Level RF Power Measurements:** For sensitive measurement, e.g. off-air analysis, a low power input is provided via the antenna input port. This low level input gives the user the ability to measure an off the air signal as low as -100 dBm or -115 dBm with the internal pre-amp selected.


**High Stability Time Base:** With a 0.01 ppm OCXO frequency standard, the 3920 provides ultra-reliable RF frequency measurements.

**0.6 dB Accurate (Typical) RF Generators:** Level accuracy is important in determining today's receiver performance in design, manufacturing and field service environments. With a 1 dB (0.6 dB typical)

level accuracy on the RF output ports, the 3920 provides consistent results in testing receiver parameters.

**Full Span Spectrum Analyzer:** View signals from 1 MHz to 1 GHz standard with the 3920 or to a full 2.7 GHz with the frequency extended option. With a DANL of -140 dBm (300 Hz RBW) with pre-amp enabled the 3920 provides high performance spectrum analysis. This full band analyzer provides plenty of range to view harmonics and other spurious emissions in and out of band.

**Channel Analyzer:** The channel analyzer makes it possible to monitor a 5 MHz spectral window around the carrier while simultaneously demodulating the signal. This allows the spectrum around the carrier to be analyzed while the device under test is participating in a call.

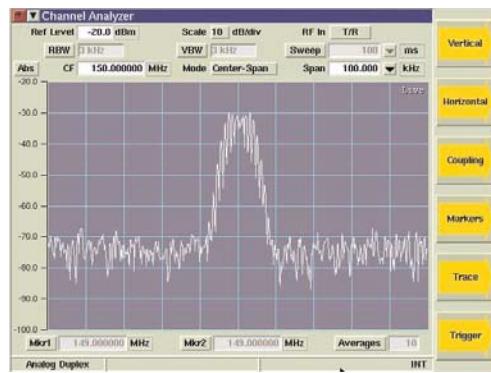

*Channel Analyzer Tile Maximized*

**Dual-Channel 4 MHz Oscilloscope:** High performance base band analysis of audio and digital signals can be performed easily and accurately.


**High Performance Audio Features:** With high accuracy audio generators from 1 mV to 8 V rms, the 3920 provides level accuracy to  $\pm 1\%$  of the setting. The audio generator frequency ranges from 20 Hz to 40 kHz with 50 ppm accuracy (10 ppm typical) and 0.1 Hz resolution provides solid audio performance for audio testing. The AF Counter features full range from 20 Hz to 20 kHz.

**Speed:** Measurement speed is directly related to processing power and internal communications. The 3920 digital architecture utilizes a mixture of powerful digital signal processors and programmable logic. Coupled to the use of a compact PCI backplane capable of delivering peak rates of >100 Mbytes/s, this ensures that the instrument has the power to acquire, synchronize and process data, producing measurement results to the user with the minimum of delay.

**Input and Output Capability:** The 3920 provides a high degree of connectivity. Instrument remote control for automated testing is provided using GPIB and supports connection to a remote server via Ethernet. Connection of printers and other peripherals is supported including keyboard, mouse and external monitor connection to provide expansion of the instrument user interface. Triggering and synchronization interfaces are provided for measurement, along with configurable single-port and dual-port duplex RF input/output and analog audio/modulation I/O.

**Ease of Use:** Whether using the 3920 manually, remotely or in Auto-Test II mode, the user interface is intuitive, logical and accessible. The instrument uses a tiled graphical display, which can be controlled by the front panel keypad or an external mouse. Tiles can be viewed

in their full-detail maximized state or the minimized state which shows key details and allows active tiles to be viewed at the same time for maximum information display.

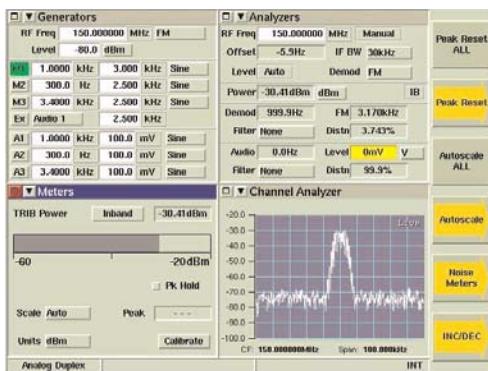

3920 Tiled Graphical Users Interface

The color display produces a bright and sharp daylight readable image that can be output to an external monitor. Color coded fields are used to simplify testing and graphical traces utilize color to clearly identify limit line and measurement traces.

**Remote Control:** The 3920 supports remote control via GPIB for automated test system control. A VXI pnp VISA driver allows easy test system integration of the 3920. In addition to a native 3920 command set, the 3920 Series also supports commands for the HP/Agilent 8920B that allows migration from the 8920B to the 3920 extremely easy.

**Remote Operation:** Use of the 3920 Ethernet connection permits remote operation from anywhere in the world making it possible to download new software or remotely interrogate instrument status. With an internal VNC server, users can install VNC software on their PC and remotely operate the front panel of the 3920 from virtually anywhere on the planet. All that is needed is the ability to access the unit's IP address.

**Cost of Ownership:** To manage through life costs, the 3920 comes with a standard 2-year warranty. Users can also purchase a 36 or 60 month warranty period extension with or without scheduled calibration. On request Aeroflex can provide customized premium warranty support designed around your specific needs.

### Optional Application Software and Special Features Enhance Test Capabilities

#### Site Monitoring Application (3920OPT051)

The 3920 brings impressive new capabilities to site monitoring applications. With option 3920OPT051, the user now has the ability to leave the 3920 on-site while the unit provides automated data logging of the site's effective receiver sensitivity. When connected to a good documented receiver (a "golden" radio), the 3920 will automatically calculate the Effective Receiver Sensitivity (ERS) at a predetermined interval (example: every 10 seconds) over a specified time (example: log ERS for 72 hours). As these measurements are taken, a min/average/max SINAD is displayed and the data is logged to the 3920's internal hard-drive. Spectral information is also optionally logged with each measurement to help locate and track sources of interference. This gives the system engineer a valuable tool in deter-


mining site location performance and system RF boundaries. The 3920 provides the user with the ability to recall the ERS point at given intervals, as well as spectral data at each of the sample points to view interferences that may be present at one particular time, but not another (for example: 2AM).

#### IQ Gen Modulation (3920OPT054)

IQCreator™ is an Aeroflex developed PC based software utility that gives the user the ability to develop their own waveforms to use as the modulation source. Since the waveforms are defined by I and Q, virtually any type of complex digital modulation format can be created. With the IQ Gen Modulation option, once the IQ waveform is created it can easily be uploaded to the 3920 and used as the modulation source in the Analog Duplex System.

#### Harmonics and Spurious (3920OPT060)


An option for the 3920 is the ability to quickly and accurately measure the harmonics and spurious of the transmitter of a radio. The fundamental frequency is automatically detected and measured and then the second and third harmonics are measured and compared. In addition, the spurious signals that are higher than the configured level are identified and displayed.

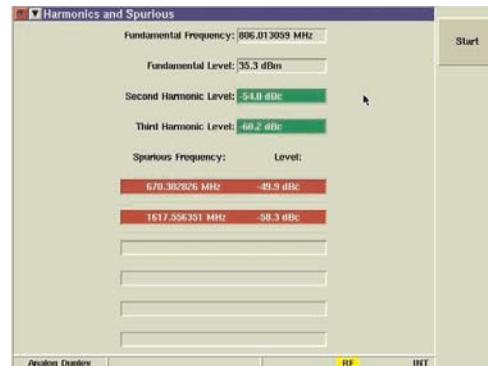

Harmonics and Spurious Tile

#### Audio Analyzer (3920OPT055)


With 3920OPT055, the 3920 Series provides audio spectral analysis of the recovered audio signal, either from the audio inputs or from the demodulated RF signal. This feature allows users to view frequency amplitude in relation to other audio frequencies, and to isolate problems such as noise in audio circuits.

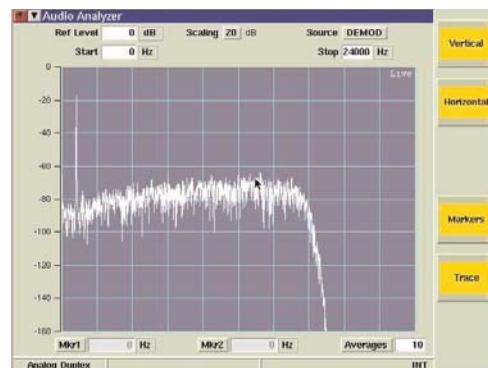

Audio Analyzer Tile Maximized

## Tracking Generator (390XOPT061)

Now available as an option to the spectrum analyzer, the 3920 tracking generator allows the user to look at the response of a duplexer, filter bank or other RF device on the spectrum analyzer. When used with the optional return loss bridge (AC4105), the spectrum analyzer/tracking generator can measure the return loss of an antenna or cable (see screen below).

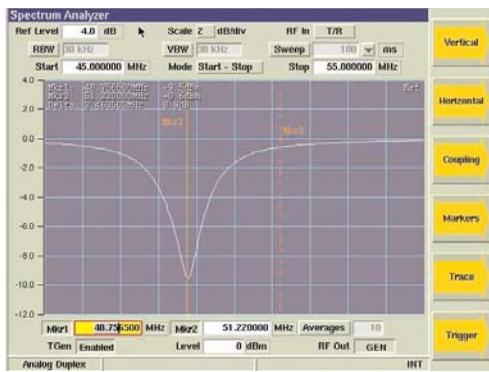

Spectrum Analyzer with Tracking Generator

## Digital Multimeter (392XOPT053)

New for the 3920 is the Digital Multimeter option, number 3920OPT053. With this option come three new ports on the front panel that are used for measuring AC/DC volts, AC/DC amps, and OHMS.




Digital Multimeter Tile Maximized

## OPTIONAL SYSTEM PERSONALITIES

With analog duplex featured as standard, the 3920 can support a number of optional test systems installed concurrently. Personalities include:

- TETRA digital trunked radio systems for mobile terminal and base station testing, TETRA direct mode
- HPD® (High Performance Data)
- APCO P25 Conventional and Trunked radios
- DMR (Digital Mobile Radio) (MOTOTRBO™)
- SmartNet™ / SmartZone™
- NXDN™
- dPMR
- ARIB STD-T98

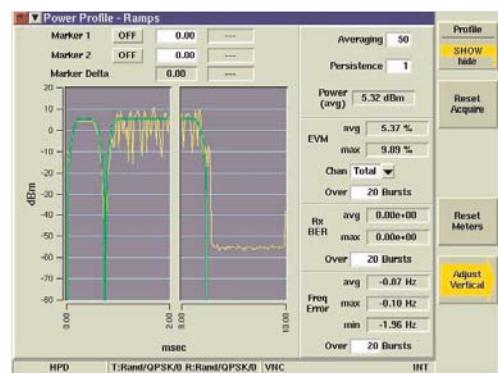

HPD® Power Profile - Ramps Tile Maximized


## P25 CONVENTIONAL OPERATION (390XOPT200)

- C4FM modulation fidelity and symbol deviation meters
- Power, frequency error and TX BER meters
- Symbol clock error meter
- Eye diagram showing transitional diagram and points to the C4FM frequency states
- Constellation plot
- C4FM symbol deviation distribution plot
- Full TIA/EIA-102 test patterns (STD1011, CAL, SILENCE, etc...) as specified by TIA- EIA-102-CAAA-C
- Decode data
- DES encryption
- IMBE vocoder
- Voice channel digital data display

The 3920 P25 Conventional Option provides test features for testing P25 radios and systems. Featured is the ability to transmit P25 C4FM standard waveforms and analyze P25 received waveforms. The analysis of the received waveforms consists of the ability to perform RF and modulation parametric tests. An IMBE vocoder enables the user to perform transmit and receive audio testing.

## P25 Trunking Operation VHF/UHF/700/800MHz (390XOPT201)

To further enhance P25 operation, the addition of the P25 Trunking option allows site simulation of a P25 control channel in any frequency band. Channel plans may be configured to test virtually any P25 trunked system. A Simulator tile log the messages sent by the radio under test and allows the 3920 to simulate a virtual mobile configured to talk to the radio under test.

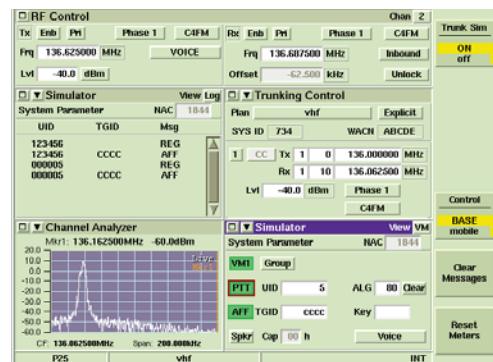

P25 Trunking Simulation with Virtual Mobile

## Explicit Mode Trunking (390XOPT212)


The advanced form of frequency channel assignment known as Explicit Messaging is supported by adding option 390XOPT212 to the P25 Trunking Operation VHF/UHF/700/800MHz option. The explicit mode of operation assigns the actual channel/frequency over the air by providing the exact TX and RX frequency assignments directly to the radio.

## P25 AES Encryption (390XOPT240)

With the addition of this option, the 3920 supports P25 encryption formats and manual key entry for systems that employ DES OFB Type III (included in 390XOPT200) or AES encryption (390XOPT240). These options allow decoding of encrypted voice frames to verify encrypted channel performance. Encryption keys may be loaded manually using either the front panel or external keypad, or with option 390XOPT209, keys may be loaded with the Project 25 Key Fill Device (KFD) interface protocol. Additionally, keys may be loaded using KVL ASN mode of operation found in KVL-3000 and older model key loaders from Motorola.

## LSM Generate and Receive/Analysis (390XOPT204)


Now available in the 3920 is the capability to generate and receive Linear Simulcast Modulation (LSM). This option, available as an extension of P25 conventional operation, enables measurements that are specific to LSM. It also adds a graphical analysis of the demodulated LSM signal that is normally only found in vector signal analyzers. Since LSM is a complex type modulation, this plot shows the inphase versus quadrature phase (I versus Q) of the demodulated LSM signal.

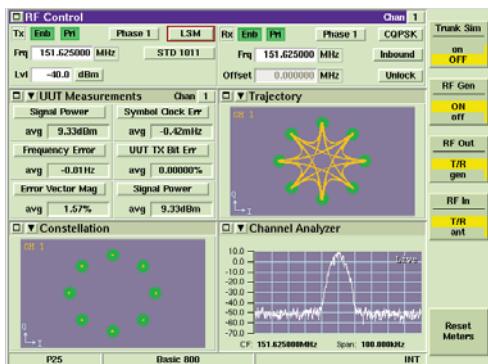

LSM Signal Analysis screen

## MOTOROLA HPD® TESTING OPERATION (390XOPT300)


- Generate/receive HPD® signals
- Modulation - 64QAM, 16QAM and QPSK (Inbound and Outbound)
- Transmitter parameters including signal power, frequency error, EVM
- Symbol clock error, RX BER, burst timing error and occupied bandwidth
- I & Q modulation analysis including constellation and trajectory plots of the data symbols, synch and pilot bits
- Display of Min/Max and average as specified by the number of bursts
- Pass/Fail indication using color codes meters

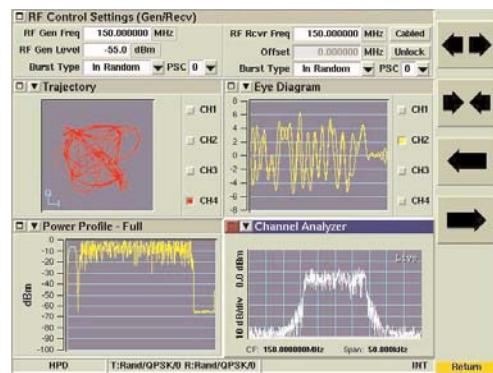

Example of HPD® Tiles

Aeroflex has developed this test mode for Motorola to address the need for testing their high performance packet data operation on both mobiles and base stations in the 700 and 800 MHz bands. HPD® systems operate within the normal 25 kHz mobile radio bandwidth. The 3920 HPD® options 390XOPT300 and 390XOPT301 provide users with the ability to test High Performance Data systems. HPD® can be configured for two modes of operation. When configured to operate in BR Mode the test set simulates base radio operation and is used to test the functionality of Motorola HPD® Mobile Subscriber Units (MSU). When configured to operate in MSU Mode the test set simulates Mobile Subscriber Unit operation and is used to test the functionality of Motorola Base Repeaters (BR). More advanced test features are available with 390XOPT301 including:

- Received Data Stream Logger. Logs the data portion of the HPD® signal and displays it in hex.
- RX Time Display. Shows Frequency Error, Power and Symbol Clock error over time.
- HPD® Magnitude/Phase Estimation. Displays magnitude and phase fluctuations of the received signal.
- Eye Diagram and I/Q over time displays
- Power Profile. Shows the power over time and in a burst (TDMA transmission).
- Power Ramps. Shows the power up and power down portion of the TDMA burst.

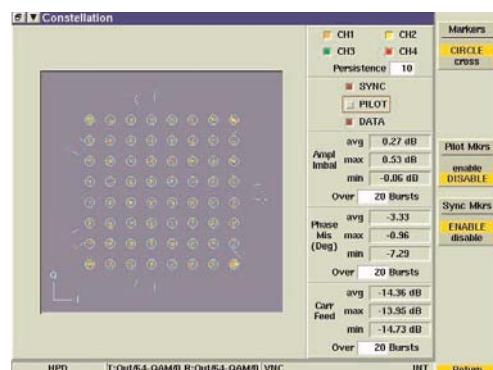

HPD® Constellation Tile Maximized

## SmartNet™/SmartZone™

This option (390XOPT207) provides support for Motorola Astro® SmartNet™/SmartZone™ systems, including support for rebanded channels in the 800MHz band.

## DMR (Digital Mobile Radio)


Add advanced testing capability for DMR (Digital Mobile Radio) with 390XOPT400. This option enables the Aeroflex 3920 Series Digital Radio Test Set to test and align a wide range of DMR radios. DMR radio technology is a new digital radio format offering advanced communications features specified by the ETSI technical standard 102-361. DMR technology is currently under development or being released by a number of OEM radio manufacturers, and includes Motorola's new MOTOTRBO® technology.

## NXDN™

Add advanced testing capability for NXDN™ with 390XOPT440. This option enables the Aeroflex 3920 Series Digital Radio Test Set to perform a variety of Transmitter and Receiver tests on any NXDN™ radio. Transmitter measurements include: Signal Power, Frequency, FSK Error, Symbol Deviation, TX BER and Symbol clock error. The system supports both 4800 and 9600 band systems. Measurements can also be displayed as an EYE Diagram, Symbol Distribution plot and a Symbol Constellation plot. A Power over time graph is provided to diagnose a variety of power related issues. Receiver BER testing is supported with signal generation of STD 1031, STD CAL, STD 511 (.153) and STD\_INTFR patterns.


## TETRA

- Mobile station testing with test signal T1 (390XOPT110)
- Base station testing with test signal T1 (390XOPT111)
- Generate/analyze TETRA RF signals
- Base station and mobile station testing plus testing with test signal T1
- Transmit parameter measurements including power, frequency error, EVM and burst timing
- TETRA RF power meter and burst power analysis up to 125 W
- Modulation analysis with I/Q constellation and trajectory display
- Receiver Bit Error Rate (BER) and Message Error Rate (MER) measurements
- Pass/Fail indication using color coded meters
- TETRA protocol analyzer/simulator
- Data display mode
- Time stamped protocol history
- Option for testing Direct Mode Operation (DMO)

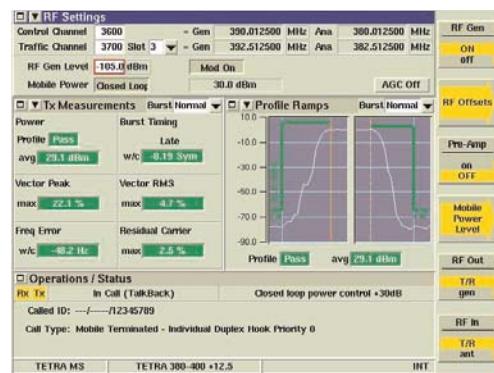


Example of TETRA MS Tiles

For TETRA applications, the 3920 is the successor to the Aeroflex 2968 TETRA Radio Test Set, the established industry standard for TETRA R&D, manufacturing, application development and service operations. Building upon the experience gained over many years of TETRA test, the 3920 with the TETRA options provides the world's best solution for testing TETRA radios. TETRA system options provide signaling and physical layer measurement requirements for testing TETRA radio equipment. Measurements are made in accordance with ETSI EN 300 394-1 for on channel transmitter and receiver parameters. Signaling functions support TIP (Tetra Interoperability Profile) compliant TETRA radios, thus ensuring optimum compatibility with TETRA equipment from various suppliers. Whatever the device under test, the TETRA system options have the flexibility to measure the various burst types specified by the TETRA standard including normal bursts, control bursts and synchronization bursts. The 3920 offers high speed measurement capabilities to expedite production testing. As a direct benefit of high power signal processing capacity, TETRA measurements are performed nearly 9 times faster than its predecessor.

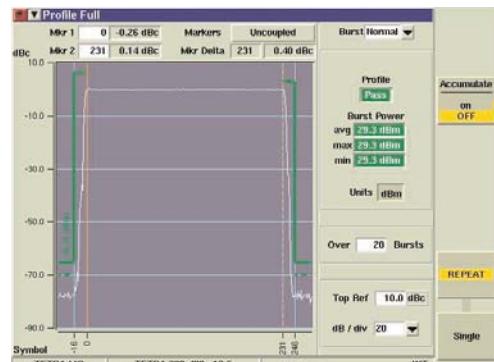

Profile Full Tile Maximized

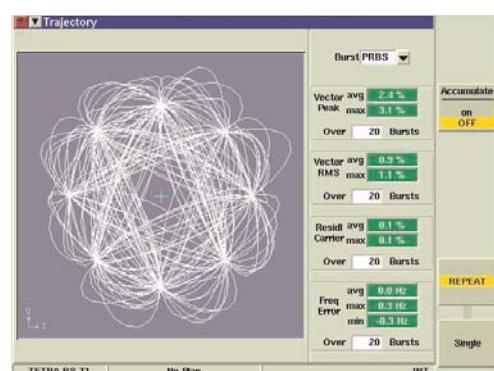

TETRA Trajectory Tile Maximized

## Call Processing Highlights

The 3920 can be freely configured to emulate a TETRA network by selection of the appropriate channel plan, country code, network code, color code, etc. Once configured, registration, group attachment and TETRA call types including group call, private call, emergency call, telephone call and user defined call can all be tested. SDS messages (types 1 to 4 and SDS-TL) can be sent or received. The 3920 TETRA system option displays a range of mobile reported information relating to registration, group attachment, test mode, call type, called party, status messages, text messages, and DTMF digits dialed.



Protocol History Maximized Tile

## TETRA Test Mode T1 and T1 Loopback

The TETRA MS and TETRA BS options provide various T1 test signals as defined in ETSI EN 300 394-1, for performing manual testing of TETRA base station and mobile stations receivers. The test signal T1 in the MS T1 application, provides control information to the mobile to aid testing e.g. burst type, max, TX power, loopback commands. These T1 test signals can be used by the mobile in a test mode to output received demodulated data to a test interface for external processing of receiver Bit Error Rate (BER). Alternatively, the mobile can be commanded by the test signal T1 to loop back the received data to the 3920 which can then perform BER/MER/PUEM measurement. In the BS T1 application, the 3920 also supports T1 loopback BER/MER/PUEM measurements for base stations.

## TETRA Test (TT) Protocol Support

The TETRA MS option provides support for the TETRA Test (TT) protocol as defined in ETSI EN 300 394-1. The TT protocol allows the mobile to be tested in a loopback mode whereby the mobile's BER, MER, and RBER can all be reported.

## Audio Testing

Subjective audio testing is supported for simplex and duplex calls. Audio spoken into the mobile's microphone is received and stored by the test set, which then re-transmits the speech so that it is replayed through the mobile's speaker or ear piece with 2 seconds delay added, thus providing an end-to-end audio quality test.

## Direct Mode Functionality (390XOPT112)

The 3920 also supports the testing of Direct Mode Operation. The 3920 can initiate or receive calls from a mobile that is operating in direct mode and then make transmitter measurements such as power, frequency error and modulation accuracy. The operation and graphical displays are very similar to the normal TETRA operation.

## TETRA Energy Economy Mode (390XOPT114)

This optional mode of operation provides protocol signaling to control a mobile's energy economy mode from "Stay alive" through energy groups EG1 (shortest sleep) to EG7 (longest sleep) and is used in conjunction with the comprehensive signaling capabilities already within the TETRA MS option. This operation enables developers, operators and users to configure battery test scenarios to simulate particular operational conditions. It gives them the testing flexibility to characterize the expected battery life performance in its intended operational use on the network.

control a mobile's energy economy mode from "Stay alive" through energy groups EG1 (shortest sleep) to EG7 (longest sleep) and is used in conjunction with the comprehensive signaling capabilities already within the TETRA MS option. This operation enables developers, operators and users to configure battery test scenarios to simulate particular operational conditions. It gives them the testing flexibility to characterize the expected battery life performance in its intended operational use on the network.

## AUTO-TEST II

- Develop automated tests for AM/FM and P25 systems
- Design your own Graphical User Interface
- Uses TCL scripting language
- Utilizes the full set of 3920 RCI commands

Available as an option for the 3920 is the Auto-Test II operation. Providing the ultimate in flexibility, this option gives the user the ability to control the operation of 3920 using the TCL scripting language. The control of the functions of the 3920 is performed through the use of RCI commands, which are sent as part of the TCL program developed by the user.



Example of Auto-Test II Display

## XTS-5000 Auto Alignment (390XOPT600)

Validate radios faster than ever with ease. Connect a single cable, press "Test and Align" and you are free to do more important things. This application is self contained within the 3920 and automatically performs the functions of radio alignment and verification to ensure optimal radio performance. This application can test and align radios in as little as 5 minutes. This package provides support for the following radios: XTS®5000, XTS®2500, XTS®1500, XTS®4000, MT 1500, PM1500™, SSE 5000, ASTRO® XTL™ 5000, ASTRO® XTL™ 2500, ASTRO® XTL™ 1500 and Astro® Spectra Plus. Requires 390XOPT200 and 390XOPT218.

## Alignments

- Reference oscillator
- High power
- Mid power
- Low power
- Deviation balance
- Deviation limiting
- Front End alignment

## Performance tests

- P25 modulation fidelity
- P25 symbol deviation
- P25 RX BER

### XTL Automatic Power Alignment (390XOPT602)

Adds the capability to do a full power alignment on ASTRO® XTL™ 2500 and ASTRO® XTL™ 5000 mobiles. Typical alignment time is less than 4 minutes for a full power characterization alignment. Requires 390XOPT200, 390XOPT218 and 390XOPT600.

### XTS-3000 Auto Alignment (390XOPT601)

Provides the functionality of 390XOPT600 for the following radios: XTS® 3000, ASTRO® Saber, ASTRO® Spectra. Requires 390XOPT200 and 390XOPT218.

### LMR Auto-Test (390XOPT603)

Validate radios faster than ever with ease. This application is self contained within the 3920 and automatically performs the test functions as prescribed by the EIA/TIA-603 standards for testing any FM Land Mobile Radio. Configure up to 30 channels with independent test customization for each channel.

#### TX Tests

- Frequency
- Power
- CTCSS
- Microphone sensitivity
- Modulation limiting
- Audio distortion
- Audio frequency response
- FM hum and noise

#### RX Tests

- Audio distortion
- Audio sensitivity
- Audio frequency response
- Usable sensitivity
- Displacement bandwidth
- Audio squelch sensitivity
- Audio squelch blocking
- Hum and noise

Test High/Low or both power level settings on any channel with support for a PTT line to auto-key/de-key the transmitter. Single channel test execution is allowed to re-check failed channels. Supports re-test, accept failure or abort on any failed test. Supports store and recall for test configurations and test results. Network or local printer support allows for an immediate hard copy to be obtained.

## SPECIFICATION

---

### RF SIGNAL GENERATOR

---

#### FREQUENCY

##### Range

10 MHz to 1.05 GHz (standard) (Usable from 100 kHz)  
10 MHz to 2.7 GHz (392XOPT058) (Usable from 100 kHz)

#### Resolution

1 Hz

#### Accuracy

Frequency standard  $\pm 1$  count

#### OUTPUT LEVEL

##### Range

T/R Port: -130.0 to -30.0 dBm

Duplex: -130.0 to +10.0 dBm (+10 dBm max for CW or FM; 0 dBm max for complex modulation)

#### Resolution

0.1 dB

#### Accuracy (for level > -110 dBm)

T/R port:  $\pm 1.0$  dB (Typical better than  $\pm 0.6$  dB)

GEN port:  $\pm 1.0$  dB (Typical better than  $\pm 0.6$  dB)

## SPECTRAL PURITY

---

#### Residual FM

<15 Hz (300 Hz to 3 kHz bandwidth)

#### Residual AM

<0.1% RMS (300 Hz to 3 kHz bandwidth)

#### Harmonics

<-34 dBc (Typically -40 dBc, RF level set at +10 dBm)

#### Non-Harmonics

<-55 dBc (all freq. except crossovers)

<-35 dBc (Crossover freq. = 3411.4 MHz - Gen freq.)

#### Phase Noise

<-93 dBc/Hz (20 kHz offset, RF <1.05 GHz)

<-90 dBc/Hz (20 kHz offset, RF >1.05 to 2.7 GHz)

## MODULATION

---

#### INTERNAL FM

##### RF Range

10 MHz to 1.05 GHz (standard) (Usable from 100 kHz)

10 MHz to 2.7 GHz (392XOPT058) (Usable from 100 kHz)

##### Deviation

$\pm 0.001$  to  $\pm 150$  kHz, OFF

##### Accuracy

3% (From  $\pm 1$  kHz to  $\pm 100$  kHz deviation, 20 Hz to 15 kHz rate)

##### Resolution

1 Hz

##### Deviation Rate

20 Hz to 15 kHz

##### Waveform

Sine, Square, Triangle, Ramp, Digital Coded Squelch, DTMF, Two Tone Sequential, Tone Remote, ZVE1, ZVE12, ZVE13, PZVE1, DZVE1, PDZVE1, CCIR1, CCIR2, PCCIR, EEA, EUROSIG, NATEL, EIA, MODAT

##### THD

<1% (1 kHz rate, 6 kHz deviation, 300 Hz to 3 kHz BW)

## INTERNAL AM

### RF Range

10 MHz to 1.05 GHz (standard) (Usable from 100 kHz)

10 MHz to 2.7 GHz (392XOPT058) (Usable from 100 kHz)

### Modulation Range

0 to 100%

### Accuracy

1% (Modulation from 10% to 90%)

### Resolution

0.1%

### Rate

20 Hz to 15 kHz

### Waveform

Sine, Square, Triangle, Ramp, Digital Coded Squelch, DTMF

### THD

<1% (1 kHz rate, 30 to 70% AM, 300 Hz to 3 kHz BW)

## INTERNAL SINGLE-SIDEBAND (SSB)

### RF Range

10 MHz to 1.05 GHz (standard) (Usable from 100 kHz)

10 MHz to 2.7 GHz (392XOPT058) (Usable from 100 kHz)

### Modulation Selection

Upper SideBand (USB) or Lower SideBand (LSB)

### Modulation Range

0 to 100%

### Resolution

0.1%

### Rate

300 Hz to 3 kHz

### Waveform

Sine, Square, Triangle, Ramp, Digital Coded Squelch

## EXTERNAL AM/FM/SSB

### AUDIO INPUTS

With 1 Vrms, AM/FM/SSB have same characteristics as internal sources,  $\pm 10\%$  of indicated setting. (Audio 1 or Audio 2 input from 20 Hz to 15 kHz (300 Hz to 3 kHz SSB) unbalanced). 8 Vrms max mod input level.

### MICROPHONE INPUT

With 50 mVrms, AM/FM/SSB have same characteristics as internal sources,  $\pm 10\%$  of indicated setting. (MIC Input from 100 Hz to 15 kHz (300 Hz to 3 kHz SSB)).

## INTERNAL I-Q (OPTIONAL)

### RF Range

10 MHz to 1.05 GHz (standard) (usable from 100 kHz)

10 MHz to 2.7 GHz (392XOPT058) (usable from 100 kHz)

### Modulation

IQCreator<sup>®</sup> file downloads for custom I-Q modulation

## RF RECEIVE MEASUREMENTS

### RF RECEIVER

#### FREQUENCY

#### Range

10 MHz to 1.05 GHz (standard) (Usable from 100 kHz)

10 MHz to 2.7 GHz (392XOPT058) (Usable from 100 kHz)

#### SENSITIVITY

<-100 dBm (10 dB SINAD, FM, 25 kHz, 1 kHz rate, 6 kHz FM deviation, 300 Hz to 3.4 kHz AF filter, pre-amp OFF)

<-113 dBm (10 dB SINAD, FM, 25 kHz, 1 kHz rate, 6 kHz FM deviation, 300 Hz to 3.4 kHz AF filter, pre-amp ON)

#### SELECTIVITY

#### IF Bandwidth

6.25, 8.33, 10, 12.5, 25, 30, 100, 300 kHz filters

#### DEMOD OUTPUT LEVEL

#### FM

2.5 Vrms  $\pm 10\%$  (for deviation  $\pm 1/2$  of selected BW; 25 kHz BW same output level as 30 kHz BW)

#### AM

3.0 Vrms  $\pm 10\%$  (for 100% AM)

#### RF COUNTER

#### FREQUENCY

#### Range

10 MHz to 1.05 GHz (standard) (Usable from 100 kHz, auto-tune)

10 MHz to 2.7 GHz (392XOPT058) (Usable from 100 kHz, auto-tune)

#### Resolution

1 Hz

#### Accuracy

Frequency standard  $\pm 1$  count

#### Level (Range)

T/R port: -10 to +50 dBm (Find level is selectable)

ANT port: -60 to +10 dBm (Find level is selectable)

#### RF POWER METER (BROAD BAND)

#### FREQUENCY

#### Range

10 MHz to 1.05 GHz (standard) (Usable from 100 kHz)

10 MHz to 2.7 GHz (392XOPT058) (Usable from 100 kHz)

#### Level

100 mW to 125 W (Usable from 10 mW)

#### Resolution

4 digits for W or 0.1 dB

#### Accuracy

10%,  $\pm 1$  digit

#### Power Measurement Range

T/R port: 100 mW to 125 W (25% on/off ratio)

#### RF POWER METER (IN BAND)

#### FREQUENCY

#### Range

10 MHz to 1.05 GHz (standard) (Usable from 100 kHz)

10 MHz to 2.7 GHz (392XOPT058) (Usable from 100 kHz)

#### Level

T/R port: -60 to +51 dBm

Lowest reading is receiver BW dependent (Narrower bandwidths can measure lower levels).

ANT port: -100 to +10 dBm

Lowest reading is receiver BW dependent (Narrower bandwidths can measure lower levels).

#### AM Filter BW

6.25, 8.33, 10, 12.5, 25 and 30 kHz

#### FM Filter BW

6.25, 10, 12.5, 25, 30, 100, and 300 kHz

#### Resolution

0.1 dB

#### Accuracy (after user calibration, Preamplifier OFF)

$\pm 1$  dB (Input level above minimum for selected BW (display not yellow); typically better than  $\pm 0.6$  dB)

#### RF ERROR METER

Counter Range

0 to  $\pm 2.5$  MHz from receiver frequency (6 MHz IF BW)

#### Accuracy

Frequency standard  $\pm 1$  count

#### Resolution

1 Hz

#### Level

T/R port: -10 to +50 dBm

ANT port: -60 to +10 dBm

#### DEMODULATION METERS

##### DEMOD COUNTER

##### FREQUENCY

##### Range

20 Hz to 20 kHz (1 to 100 kHz FM deviation, IF BW set appropriately for the received modulation BW)

20 Hz to 10 kHz (30% to 90% AM, IF BW set appropriately for the received modulation BW)

##### Resolution

0.1 Hz

##### Accuracy

$\pm 50$  ppm  $\pm 1$  count ( $\pm 10$  ppm typical)

##### Input Waveform

Sine or Square

#### RF CHARACTERISTICS

##### Input RF

10 MHz to 1.05 GHz (standard) (Usable from 100 kHz)

10 MHz to 2.7 GHz (392XOPT058) (Usable from 100 kHz)

##### RF Level

T/R port: -10 to +50 dBm

ANT port: -80 to +10 dBm

#### FM DEVIATION METER

##### Range

0 to 150 kHz

##### Scales

1 to 200 kHz in a 1, 2, 5 sequence, plus auto-scale

#### Resolution

10 Hz

#### Accuracy

$\pm 3$  % plus source residual,  $\pm 1$  count (1 to 150 kHz FM deviation, IF BW set appropriately for the received modulation BW)

#### FM CHARACTERISTICS

##### Rate

20 Hz to 20 kHz (IF BW set appropriately for the received modulation BW)

##### RF Range

10 MHz to 1.05 GHz (standard) (Usable from 100 kHz)

10 MHz to 2.7 GHz (392XOPT058) (Usable from 100 kHz)

##### RF Level

T/R port: -10 to +50 dBm

ANT port: -80 to +10 dBm

#### AM METER

##### Range

0 to 100%

##### Scales

1 to 100% in a 1, 2, 5 sequence, plus auto-scale

##### Resolution

0.1%

##### Accuracy

$\pm 3$  % + source residual,  $\pm 1$  count (30 to 90% AM, IF BW set appropriately for the received modulation BW)

#### AM CHARACTERISTICS

##### Rate

20 Hz to 15 kHz (IF BW set appropriately for the received modulation BW)

**RF Range**

10 MHz to 1.05 GHz (standard) (Usable from 100 kHz)

10 MHz to 2.7 GHz (392XOPT058) (Usable from 100 kHz)

**RF Level**

T/R port: -10 to +50 dBm

ANT port: -80 to +10 dBm

**AUDIO FUNCTION GENERATOR(S)**

Up to 3 function generators can be combined into 1 output signal.

**WAVEFORM**

Sine, Square, Triangle, Ramp, Digital Coded Squelch, DTMF, Two Tone Sequential, Tone Remote, ZVEI1, ZVEI2, ZVEI3, PZVEI, DZVEI, PDZVEI, CCIIR1, CCIIR2, PCCIR, EEA, EUROSIG, NATEL, EIA, MODAT

**FREQUENCY****Range**

Sine: 20 Hz to 40 kHz (usable 1 Hz to 40 kHz)

Square, Triangle and Ramp: 20 Hz to 4 kHz (usable 1 Hz to 15 kHz)

**Resolution**

0.1 Hz

**Accuracy**

±50 ppm ±1 count max, ±10 ppm typical

**LEVEL (SINE)****Range**

1 mV to 5V RMS into a 10 kload

**Resolution**

0.1 mV

**Accuracy**

±1% of setting (10 kΩ load)

**Impedance**

&lt;10 Ω

**Spectral Purity**

&lt;0.5% (1 kHz, 5 Vrms, 80 kHz BW, 10 kΩ load, Sine)

&lt;1.0% (Typical, 20 Hz to 40 kHz, 100 mV to 5 Vrms, 80 kHz BW, 10 kΩ load, Sine)

**AUDIO AND MODULATION MEASUREMENTS****Audio Input Characteristics for the following meters:**

AF Counter, AF Level Meter, SINAD Meter, Distortion Meter, Hum and Noise Meter, Signal-to-Noise Meter

**Front Panel Audio Inputs**

Audio 1 or Audio 2 (unbalanced, chassis reference)

Audio 1 and Audio 2 (balanced, 600 Ω differential input)

**Audio Input Impedance (Audio 1 and 2)**

Hi-Z (&gt;10 kΩ) - Unbalanced input

600 Ω - Unbalanced input (8 Vrms MAX input\*)

600 Ω - Balanced input (Audio 1 and 2)

\* Note - 600 Ω unbalanced will auto-switch to Hi-Z @ 8 Vrms

**AF COUNTER****Range**

20 Hz to 20 kHz (usable from 10 Hz)

**Resolution**

0.1 Hz

**Accuracy**

±50 ppm max, ±1 count, ±10 ppm typical

**Waveshape**

Sine or square

**SIGNAL CHARACTERISTICS****Level**

10 mV to 30 Vrms (Audio 1 or Audio 2)

<b>Filter</b>	<b>Type</b>	<b>Ripple</b>	<b>-1 dB</b>	<b>-60 dB</b>
NONE	No Filter	<±0.2 dB, above 20 Hz	20 kHz	24 kHz
300 Hz	Low-Pass	<0.2 dB, above 20 Hz	400 Hz	800 Hz
5 kHz	Low-Pass	<0.2 dB, above 20 Hz	5 kHz	5.4 kHz
15 kHz	Low-Pass	<±0.2 dB, above 20 Hz	16.5 kHz	18 kHz
20 kHz	Low-Pass	<±0.2 dB, above 20 Hz	20 kHz	21 kHz
0.3 to 3.4 kHz	Band-Pass	<0.2 dB	200 Hz / 3.7 kHz	80 Hz / 4.4 kHz
0.3 to 5 kHz	Band-Pass	<0.2 dB	200 Hz / 5 kHz	80 Hz / 5.4 kHz
0.3 to 15 kHz	Band-Pass	<±0.2 dB	200 Hz / 16.5 kHz	80 Hz / 18 kHz
0.3 to 20 kHz	Band-Pass	<±0.2 dB	200 Hz / 20 kHz	80 Hz / 21 kHz
PSOPH C-MSG Spec	Band-Pass	Per C-MSG Spec	Per C-MSG Spec	Per C-MSG
PSOPH CCITT	Band-Pass	Per CCITT Spec	Per CCITT Spec	Per CCITT Spec
300 Hz	High-Pass	<0.2 dB	200 Hz	80 Hz

**AF LEVEL METER****Input**

Audio 1 or 2

**Range**

0 to 30 Vrms

**Resolution**

Volts: 1 mV (input &lt; 1 V),

10 mV (input = 1 V)

dB<sub>r</sub>, dB<sub>V</sub>, dB<sub>m</sub>: 0.01 dB**Scales**

Volts: 20 mV to 50 V in a 1, 2, 5 sequence plus Auto

dB<sub>r</sub>: 1 dB<sub>r</sub> to 100 dB<sub>r</sub> in a 1, 2, 5 sequence plus AutodB<sub>V</sub>: -40, -20, 0, 20, 40 dB<sub>V</sub> plus AutodB<sub>m</sub>: -30, -20, -10, 0, 10, 20, 30, 40 dB<sub>m</sub> plus Auto**Frequency**

20 Hz to 20 kHz

**Accuracy**

5% (Unbalanced, Hi-Z, 300 to 3 kHz, 0.1 to 30 Vrms)

## SINAD METER

### Range

0 to 60 dB

### Resolution

0.01 dB

### Accuracy

$\pm 1$  dB,  $\pm 1$  count ( $SINAD > 3$  dB,  $\leq 40$  dB, 5 kHz LP AF filter)

## SIGNAL CHARACTERISTICS

### Signal Frequency

300 Hz to 5 kHz (Entry Range - 0 Hz to 24,000 Hz)

### Signal Level

0.1 to 30 Vrms

## DISTORTION METER

### Range

0.0% to 100.0%

### Resolution

0.1%

### Accuracy

$< \pm 0.5\%$  (Distortion 1% to 10%, 5 kHz LP AF filter)

$< \pm 1.0\%$  (Distortion 10% to 20%, 5 kHz LP AF filter)

## SIGNAL CHARACTERISTICS

### Signal Frequency

300 Hz to 5 kHz (Entry Range - 0 Hz to 24,000 Hz)

### Signal Level

0.1 to 30 Vrms

## HUM AND NOISE

### Modes

Mode	Stimulus	Stimulus Port	Measurement Input Port	Measurement Port
1	RF Generator	TR/Gen	AF Input	Audio In 1 or 2
2	AF Generator	Fctn Gen Out	RF Receiver	TR/Antenna

### Meter Range

-100 dB to 0 dB

### Resolution

0.01 dB

### Accuracy

$\pm 1$  dB,  $\pm 1$  count ( $> -60$  dB,  $\leq -20$  dB)

### Signal Frequency

300 Hz to 5 kHz (Entry Range - 0 Hz to 24,000 Hz)

### Audio Input Signal Level (Mode 1)

0.1 to 30 Vrms

### RF Level Input (Mode 2)

T/R Port: -10 to +50 dBm

ANT Port: -80 to +10 dBm

## SIGNAL-TO-NOISE RATIO (SNR)

### Modes

Mode	Stimulus	Stimulus Port	Measurement Input Port	Measurement Port
1	RF Generator	TR/Gen	AF Input	Audio In 1 or 2
2	AF Generator	Fctn Gen Out	RF Receiver	TR/Antenna

### Meter Range

0 to 60 dB

### Resolution

0.01 dB

### Accuracy

$\pm 1$  dB,  $\pm 1$  count ( $> 3$  dB,  $\leq 40$  dB, 5 kHz LP AF Filter)

### Signal Frequency

300 Hz to 5 kHz (Entry Range - 0 Hz to 24,000 Hz)

### Audio Input Signal Level (Mode 1)

0.1 to 30 Vrms

### RF Level Input (Mode 2)

T/R Port: -10 to +50 dBm

ANT Port: -80 to +10 dBm

ANT Port: -80 to +10 dBm

## AUDIO FILTERS (CHARACTERISTIC RESPONSE)

## RF SPECTRUM ANALYZER

### FREQUENCY

### Range

10 MHz to 1.05 GHz (standard) (Usable from 100 kHz)

10 MHz to 2.7 GHz (392XOPT058) (Usable from 100 kHz)

### Resolution

1 Hz

### Frequency Accuracy

Same as frequency standard

### Span

Span mode: start/stop, center/span and zero span

Span width: 2 kHz to full span

### Display Accuracy

Span accuracy + frequency accuracy + 50% of RBW

### Span Range

Selection list is 2 kHz to full span in a 1, 2, 5 sequence, plus zero span (Span may be entered numerically down to 1 Hz resolution)

### Span Accuracy

$\pm 1\%$  of span width

### Marker Accuracy

$\pm 1\%$  of span width

### LEVEL

### Ref Level Range

T/R port: -50 to +50 dBm

ANT port: -90 to +10 dBm

### Vertical Scales

1, 2, 5, 10 dB/division

### Reference Level Resolution

0.1 dB

### Ref Level Units

dBm, dB $\mu$ V, dBmV

### Dynamic Range

70 dB (Antenna, no attenuation, ref level -30 dBm, 30 kHz RBW)

### Bandwidth Switching Error

$\pm 1$  dB (After normalize)

<b>Log Linearity</b>	<b>Number of Markers</b>
±1 dB	2
<b>Accuracy</b>	<b>Marker Functions</b>
±1 dB (Input signal -10 dB from ref level, normalized, preamp off)	Marker to peak
<b>Attenuator Selections</b>	Marker to next right/left
0 to 50 dB of attenuation, controlled by changing the ref level	Marker to minimum
<b>3rd Order Intermodulation</b>	Marker to ref level
-60 dBc (Input level of -30 dBm, ref level at -20 dBm)	Marker to center frequency
<b>Harmonic Spurious</b>	Marker sets span
-55 dBc (Input level of -30 dBm, ref level at -20 dBm)	Marker sets vertical scale (zero span only)
<b>Non-Harmonic Spurious</b>	
-60 dBc (Input level of -30 dBm, ref level at -20 dBm)	
<b>Displayed Average Noise Level (DANL)</b>	
-125 dBm (Typical, 300 Hz RBW, ANT port terminated, 20 sweep average) -140 dBm with pre-amp enabled	
<b>RESOLUTION BANDWIDTH</b>	
<b>RBW Selections</b>	
300 Hz, 3 kHz, 30 kHz, 60 kHz, 300 kHz, 6 MHz	
<b>RBW 60 dB/3 dB Filter Shape</b>	
>10:1	
<b>Selectivity - Filter Shape</b>	
60 dB/3 dB ratio better than 10:1	
<b>Accuracy</b>	
±10% of RBW for 3 kHz, 30 kHz, 60 kHz, 300 kHz	
-10% / +25% of RBW FOR 6 MHz	
±20% of RBW for 300 Hz	
<b>Bandwidth Switching Error</b>	
±1 dB	
<b>VIDEO BANDWIDTH</b>	
10 Hz to 1 MHz in a 1, 3, 10 sequence, plus NONE	
<b>SWEEP</b>	
<b>Frequency Sweep Time</b>	
100 mS to 100 S in 1 ms increments	
<b>Zero Span Sweep Time</b>	
50 mS to 100 S in 1 ms increments	
<b>Sweep Trigger Source</b>	
Internal and external	
<b>Trigger Modes</b>	
Continuous (repeat), single (single-shot)	
<b>FUNCTION/FEATURE</b>	
<b>Display Modes</b>	
Live, average, max hold	
<b>Averages</b>	
1 to 100	
<b>MARKERS</b>	
<b>Track</b>	
Frequencies (or time) and amplitudes	
<b>Number of Markers</b>	
2	
<b>Marker Functions</b>	
Marker to peak	
Marker to next right/left	
Marker to minimum	
Marker to ref level	
Marker to center frequency	
Marker sets span	
Marker sets vertical scale (zero span only)	
<b>TRACKING GENERATOR</b>	
<b>TRACKING GENERATOR OUTPUT</b>	
Refer to <b>RF SIGNAL GENERATOR</b> section for:	
Frequency range and accuracy	
Output level range, resolution and accuracy at center frequency	
Spectral purity	
<b>CENTER FREQUENCY, SPAN, SWEEP TIME</b>	
Same as Spectrum Analyzer	
<b>TRACKING GENERATOR CONTROLS</b>	
Output port selection	
RF level	
Reference cal	
<b>OSCILLOSCOPE</b>	
<b>DISPLAY</b>	
<b>Traces</b>	
2	
<b>Trace Types</b>	
Live, captured, accumulated	
<b>Markers</b>	
2	
<b>Marker Functions</b>	
Time with amplitude, deviation or %depth	
Delta marker (including $1/\Delta t$ , e.g. Hz)	
<b>VERTICAL</b>	
<b>3 dB Bandwidth</b>	
16 MHz	
<b>Frequency Range</b>	
DC to 4 MHz (40 MS/s sampling rate)	
<b>Input Range</b>	
0 to 100 Vpeak Max, Category II	
<b>Scales</b>	
2 mV to 20 V/division in a 1, 2, 5 sequence (8(h) x 10 (w) graticule display)	
<b>Accuracy</b>	
5% of full scale (DC to 1 MHz)	
10% of full scale (1 to 4 MHz)	

**Resolution**

Better than 1% of full scale

**Coupling**

DC, AC, GND

**HORIZONTAL****Sweep Factors**

1  $\mu$ Sec to 1 Sec/division in a 1, 2, 5 sequence

**Accuracy**

>1.5% of full scale

**Resolution**

>1% of full scale

**Input Impedance**

1  $M\Omega$ , 20 pF

**TRIGGER****Trigger Source**

Trace A, trace B, EXT, (or trace C with no CH1 or CH2 Input)

**Trigger Edge**

Rising/falling

**Trigger Mode**

Auto/normal

Continuous/single shot

**External Trigger Level**

Hi-Z BNC input on the rear panel of the unit

Adjustable from -5 to +5 V

**FREQUENCY STANDARD I/O****INTERNAL FREQUENCY STANDARD OUTPUT (OCXO)****Frequency**

10 MHz (nominal)

**Output Level**

1 Vpp (nominal) into 50  $\Omega$

**Temperature Stability (0 to 50 degrees C)**

$\pm 0.01$  ppm

**Aging Rate**

$\pm 0.1$  ppm/year after 1 month continuous use

**Warm Up Time**

Less than 5 min. to  $\pm 0.02$  ppm

**EXTERNAL FREQUENCY INPUT****Frequency**

10 MHz

**Input Level**

1 to 5 Vpp for sine waves

3.3/5 V TTL for square waves

**Connector**

BNC socket (10 k $\Omega$  Input/50  $\Omega$  Output)

**AUDIO SPECTRUM ANALYZER (OPTIONAL)****FREQUENCY****Range**

Start and Stop Frequency - 0 Hz to 24,000 Hz

**Resolution**

1 Hz

**Accuracy**

$\pm 50$  ppm,  $\pm 10$  ppm Typical

**Span**

2 kHz min to 24 kHz max

**LEVEL****Vertical Scales**

1, 2, 5, 10, 20 dB per division

**Reference Level**

0 dB Full Scale (dB<sub>r</sub>)

**Dynamic Range**

Greater than 120 dB

**Accuracy**

$\pm 1$  dB from 300 Hz to 15 kHz

**MARKERS****Number of Markers**

2

**HARMONICS AND SPURIOUS (OPTIONAL)****HARMONIC LEVEL****Range**

0 to -60 dBc

**Resolution**

0.1

**Accuracy**

Same as spectrum analyzer

**SPURIOUS LEVEL****Range**

0 to -60 dBc

**Resolution**

0.1

**Accuracy**

Same as spectrum analyzer

**P25 (OPTIONAL)****P25 Generator****FREQUENCY****Range**

10 MHz to 1.05 GHz (standard) (Usable from 100 kHz)

10 MHz to 2.7 GHz (392XOPT058) (Usable from 100 kHz)

**Resolution**

1 Hz

**Accuracy**

Frequency standard +/- 1 count

<b>LEVEL</b>	<b>Accuracy</b>
<b>Range</b>	10%, $\pm 1$ digit
T/R Port: -130.0 to -40.0 dBm	<b>Power Measurement Range</b>
Gen Port: -130.0 to +0.0 dBm	T/R port: 100 mW to 125 W (25% on/off ratio)
<b>Resolution</b>	<b>SIGNAL POWER</b>
0.1 dB	<b>Level</b>
<b>Accuracy (for level &gt; -110 dBm &amp; Frequency &gt; 10 MHz)</b>	T/R port: -60 to +51 dBm
T/R Port: +/- 1.0 dB (Typical better than +/- 0.6 dB)	ANT port: -100 to +10 dBm
GEN Port: +/- 1.0 dB (Typical better than +/- 0.6 dB)	<b>Resolution</b>
<b>Modulation</b>	0.1 dB
C4FM, CQPSK, LSM	<b>Accuracy (after user calibration, Preamp OFF)</b>
<b>Test Patterns</b>	$\pm 1$ dB (typically better than $\pm 0.6$ dB)
STD 1011, STD CAL, STD SILENCE, STD INTFR, STD BUSY, STD IDLE, STD 511 (0.153), STORED SPCH, VOICE, 1011, SILENCE	<b>MOD ACCURACY DISPLAYS</b>
<b>P25 RECEIVER</b>	<b>Distribution</b>
<b>Frequency</b>	Graph of the statistical distribution of the deviation at the symbol point. This graph not only shows the deviation at the symbol point, but shows the relative occurrence of that deviation.
10 MHz to 1.05 GHz (standard) (Usable from 100 kHz)	<b>Constellation</b>
10 MHz to 2.7 GHz (392XOPT058) (Usable from 100 kHz)	<b>Symbol deviation display</b>
<b>RF Level</b>	<b>Eye Diagram</b>
T/R Port: -10 to +50 dBm	Graph of the demodulated signal versus time, synchronized with the symbol points. The number of symbol periods is selectable. Range is 2 to 16.
ANT Port: -60.0 to +10 dBm (with preamp -63)	<b>Trajectory</b>
<b>RECEIVER MEASUREMENTS</b>	Graph of the demodulated signal in the complex domain. This graph shows the Inphase versus the Quadrature phase of the demodulated C4FM, CQPSK, or LSM signal.
<b>Modulation Fidelity</b>	<b>PROTOCOL</b>
<b>Range</b>	<b>Data Link</b>
0% to 15%	<b>Header</b>
<b>Resolution</b>	MFID, ALG, KEY, TGID, MI
0.01%	<b>Voice Frame</b>
<b>FREQUENCY ERROR</b>	Frame #, NAC, DUID, KEY, ALG, MI, RAW, LCO, Protect, SF, EMG, LSD, STS 1, STS 2
<b>Range</b>	<b>CONVENTIONAL MODE SIMULATION</b>
64000 Hz	NAC, Call Type, TGID, UID, Alg ID, Key ID
<b>Resolution</b>	<b>PHASE 1 TRUNKING SIMULATION</b>
0.01 Hz	<b>System Plan Configuration</b>
<b>UUT TX Bit Error Rate</b>	<b>System Plans</b>
<b>Range</b>	Basic 800, Basic UHF, Basic VHF, Basic 700, plus multiple user defined
0% to 50%.	<b>User defined fields</b>
<b>Resolution</b>	System ID, WACN, RFSS ID, Site ID, Announcement Group Address, Local Registration Area, Service Class, Active Network, Local/Global Affiliation, Group Affiliation, Registration, WGID Mapping, WUID mapping, Protected
0.00001%	16 Channel IDs with Base Frequency, Bandwidth, TX Offset, Channel Spacing
<b>SYMBOL CLOCK ERROR</b>	<b>Trunking Control</b>
<b>Range</b>	Base Simulation sets System Plan, Implicit/Explicit mode, Control Channel ID/NUM/Frequency, Control Channel power level, Control Channel modulation, Traffic Channel ID/NUM/Frequency, Traffic Channel power level, Traffic Channel modulation.
64000 mHz	
<b>Resolution</b>	
0.01 mHz	
<b>BROADBAND POWER</b>	
<b>Level</b>	
100 mW to 125 W (Usable from 10 mW)	
<b>Resolution</b>	
4 digits for W or 0.1 dB	

## Simulator

Call Type, TGID, UID, Alg ID, Key ID

## ENCRYPTION

Supports DES Encryption (AES available with restrictions)

## DIGITAL MULTIMETER (OPTIONAL)

### AC / DC VOLTMETER

#### Full Scale Ranges

200 mV, 2 V, 20 V, 200 V, 2000 V, Auto

(150 VAC RMS, or VDC MAX input, Category II)

#### Resolution

3-½ digits (2000 counts)

#### Accuracy

DC -  $\pm 1\%$  FS  $\pm 1$  count

AC -  $\pm 5\%$  FS  $\pm 1$  count

#### AC Volts Frequency Range

50 Hz to 20 kHz

### AC / DC AMMETER

#### Full Scale Ranges

20 mA, 200 mA, 2 A, 20 A, Auto

(20 A range uses external shunt connected to Voltmeter)

#### Maximum Open Circuit Input Voltage

30 V RMS referenced to COMMON or EARTH GROUND, Category I

#### Resolution

3-½ digits (2000 counts)

#### Accuracy

DC -  $\pm 5\%$  FS  $\pm 1$  count

AC -  $\pm 5\%$  FS  $\pm 1$  count

#### AC Volts Frequency Range

50 Hz to 10 kHz

### OHMMETER

#### Full Scale Ranges

200 ohms, 2 kohms, 20 kohms, 200 kohms,

2 Mohms, 20 Mohms, Auto

#### Resolution

3-½ digits (2000 counts)

#### Accuracy

$\pm 5\%$  FS  $\pm 1$  count

## INPUT/OUTPUT CONNECTORS

### ANT (RF INPUT)

#### Connector Type

TNC

#### Function

Receiver input (input port)

#### Impedance

50  $\Omega$  (nominal)

#### VSWR (with Att $\leq 10$ dB):

Better than 1.44:1 (RF freq.  $< 1.05$  GHz)

Better than 1.58:1 (RF freq.  $> 1.05$  GHz to  $< 2.7$  GHz)

### Input Protection

10 W with warning above +17 dBm (Remove power immediately when alarm sounds)

### GEN (RF OUTPUT)

#### Connector Type

TNC

#### Function

Generator high-level output (output connector)

#### Impedance

50  $\Omega$  (nominal)

#### VSWR (with level $< 0$ dBm):

Better than 1.7:1 (RF freq.  $< 1.05$  GHz)

Better than 1.9:1 (RF freq.  $> 1.05$  GHz to  $< 2.7$  GHz)

### Input Protection

10 W with warning above +23 dBm (Remove power immediately when alarm sounds)

### T/R (RF INPUT/OUTPUT)

#### Connector Type

Type N

#### Function

RF power input, generator low-level output (input/output connector)

#### Impedance

50  $\Omega$  (nominal)

#### VSWR

Better than 1.2:1 (RF freq.  $< 1.05$  GHz)

Better than 1.3:1 (RF freq.  $> 1.05$  GHz to  $< 2.7$  GHz)

### Input Protection

200 W with warning above 135 W or power termination temp  $> 100^\circ\text{C}$ . Recommend max of 30 s ON and minimum of 2 min OFF for power levels above 50 W. (Remove power immediately when alarm sounds)

### GPIB

#### Connector Type

24 pin IEEE

#### Function

IEEE-488.1-1997

### ETHERNET

#### Connector Type

8 Position, RJ-45 100/10 Mbit/s

#### Function

10/100 Base-T network connection

### VIDEO

#### Connector Type

15-pin, D-sub, VGA

#### Function

VGA for external monitor

### MIC/ACCESSORY

#### Connector Type

8 position, female DIN

**Function**

Microphone connection, modulation input, demod output

**PARALLEL PORT****Connector Type**

25 position, female D-sub

**Function**

Printer interface

**USB****Connector Type**

Twin USB standard connection

**Function**

USB Version 1.1 interface

**TEST PORT****Connector Type**

15 position, female 3 tier D-sub

**Function**

Programmable I/O and voltage output (optional interface)

**POWER REQUIREMENTS****AC****Voltage**

100 V to 120 VAC @ 60 Hz

220 V to 240 VAC @ 50 Hz

**Power Consumption**

Nominally 120 W (200 W Max)

**Mains Supply Voltage Fluctuations**

≤10% of the nominal voltage

**Fuse Requirements**

3 A, 250 V, Type F

**ENVIRONMENTAL****OPERATING TEMPERATURE**

0 to 50°C (Tested in accordance with MIL-PRF-28800F Class 3)

**WARM-UP TIME**

15 minutes

**STORAGE TEMPERATURE**

-40 to 71°C (Tested in accordance with MIL-PRF-28800F Class 3)

**RELATIVE HUMIDITY**

80% up to 31°C decreasingly linearly to 50% at 40°C (Tested in accordance with MIL-PRF-28800F Class 3)

**ALTITUDE**

4,000 m (13,123 ft) (MIL-PRF-28800F Class 3)

**SHOCK AND VIBRATIONS**

30 G Shock (functional shock)

5-500 Hz random vibrations (Tested in accordance with MIL-PRF-28800F Class 3)

**USE**

Pollution degree 2

EMC EN61329, Class A

**RELIABILITY**

> 8,000 hour calculated MTBF

**SAFETY STANDARDS**

UL 61010B-1

EN 61010-1

CSA C22.2 No. 61010-1

**DIMENSIONS AND WEIGHT**

**Height**                   **Width**                   **Depth**

19.7 cm (7.7 in.) 35.6 cm (14.0 in.) 52.0 cm (20.5 in.)

**Weight**

16.5 kg (36.8 lbs.)

**SYSTEM CONFIGURATION**

The following information is provided to help the user understand what instruments are available on the 3920 Digital Radio Test Set.

**AVAILABLE 3920 SYSTEMS****TETRA SYSTEMS (All TETRA systems are optional)****Available Options**

Option 110 - TETRA MS (Mobile Station) and TETRA MS T1 - Compatible with software versions 1.0 and higher

Option 111 - TETRA BS (Base Station) and TETRA BS T1 - Compatible with software versions 1.0 and higher

Option 112 - TETRA DM (Direct Mode) A  
Compatible with software versions 1.2 or higher

**ANALOG SYSTEMS (Analog functions are provided as standard, but have options available under analog configuration.)**

Option 051 - Remote Site Monitoring Application - Compatible with software versions 1.1 and higher

**TETRA CHANNEL PLANS AND SIGNALLING****Channel Plans**

TETRA 380-400 (0 Hz or 12.5 kHz offset)

TETRA 410-430 (0 Hz, -6.25 kHz or 12.5 kHz offset)

TETRA 450-470 (0 Hz or 12.5 kHz offset)

TETRA 805-870 (0 Hz or 12.5 kHz offset)

TETRA 870-921 (0 Hz or 12.5 kHz offset)

No plan

User defined

**System Identity**

Mobile Country Code, MCC

Mobile Network Code, MNC

Base Color Code, BCC

Location Area Code, LA

**Test Modes**

Manual test/Auto-Test MS (see Auto-Test)

**Manual Test Signaling Functions (TETRA MS mode only)**

Protocol functions are compatible with TIP compliant mobiles.

Mobile parameter control for SSI, GSSI, power class, receiver class

Registration, test mode registration and de-registration

Private (individual) call, group call, phone call, emergency call, user defined call (mobile terminated)

Call timer and trunking type selection

Cell-re-selection (requires two test sets and a power splitter)

Short data service

Status message and SDS types 1 to 4call control (simplex calls)

Power control	worst case for a sample of up to 250 bursts
Frequency control	
Frequency handoff	
RF loopback control (TT)	
Display of mobile information	
Demodulated and channel decoded data	
Protocol history display	
Subjective mobile audio tests	
Talk back, silence and test tone (1 kHz digitally encoded)	

## TETRA MEASUREMENTS

### TETRA RECEIVER MEASUREMENTS

TETRA MS T1 mode, TETRA MS mode, TETRA BS T1 mode (T1 loop-back, TT loopback BER, MER, PUEM, RBER, with pre-set/user defined limit checking, subjective audio testing, (TETRA MS mode), audio talk-back, test tone, silence)

#### BER Testing (TETRA MS T1 mode)

BER, MER and PUEM

#### BER Testing (TETRA MS mode)

BER, RBER and MER

#### BER Testing (TETRA BS T1 mode)

BER, MER and PUEM

#### SINAD Meter

Same as platform specifications. Not available in direct mode (DM)

### TETRA TRANSMITTER MEASUREMENTS

RF power, RF power profile, burst timing, error vector magnitude, frequency error, residual carrier each with pre-set/user defined result limit checking

#### Input Range

T/R: -40 dBm to + 40 dBm  
Ant: -80 dBm to 0 dBm

#### Burst Types

MS: Control Burst (CB), Normal Uplink Burst (NUB)

BS: Normal Downlink Burst (TS1+2, TS1, and TS2),

Synchronization Burst, PRBS with no training sequence

### TETRA RF POWER METER

Average power across the useful part of the burst measured at the symbol points through a TETRA filter. Results available for avg, max and min for a sample of up to 250 bursts

#### Units

dBm/W

#### Resolution

0.1 dB / 1 mW

#### Indication

Numerical value, bar chart and progress indicator

#### Accuracy

±1.0 dB (±0.6 dB typical)

#### Level Offset Range

±40.0 dB

### TETRA RF POWER PROFILE

(see graphical displays)

### BURST TIMING ERROR (MS/MS T1 ONLY)

Timing error relative to downlink results available for avg, max, min and

Range

±510.00 symbols

#### Indication

Numerical value, bar chart and progress indicator

#### Accuracy

±0.05 symbols

#### Timing offset range

±999.99 symbols

### MODULATION ACCURACY

Modulation accuracy measures the displacement of symbol points from their ideal position. Results available for avg. and max for a sample of up to 250 bursts

#### Modulation Error Range

20.0% RMS vector error

40.0% Peak vector error

20.0% Residual carrier

#### Indication

Numerical value, bar chart and progress indicator

#### Accuracy

±0.5% at 10% error

### FREQUENCY ERROR

Frequency error is the error relative to the expected frequency.

Results available for avg., max, min and worst case for a sample of up to 250 bursts

#### Frequency Error Range

±500.0 Hz

#### Indication

Numerical value, bar chart and progress indicator

#### Accuracy

±15 Hz + frequency standard accuracy

### GRAPHICAL DISPLAYS

#### BAR CHARTS

Display of average, max, min and worst case values as appropriate with progress bar. Bar chart is color coded to indicate pass, fail low, fail high or accumulating.

#### POWER PROFILE DISPLAY

Display of power versus time for a complete burst or ramp up/ramp down intervals measured at the symbol points and displayed relative to a TETRA mask (TETRA limits or user defined) with pass/fail indication. Measured through a TETRA filter referenced (0 dB) to average power. Displayed profile and pass/fail indication are available as the average for a sample of up to 250 bursts. (N.B. multiple burst averaging is NOT available for the other graphical displays, only for the power profile).

#### Power Profile Dynamic Range

70 dB

#### Vertical Scale

20 dB/div or 0.1 dB/div in 1, 2, 5 steps

#### Accuracy

±1.0 dB (±0.6 dB typical) at symbol points for levels greater than -10 dB

### CONSTELLATION DISPLAY

Polar display of amplitude versus phase at the symbol point measured

over all symbols (SNO ~ SN max) through a TETRA filter. Also available as a rotated constellation display where all symbol point values are mapped to a single constellation point.

#### PHASE TRAJECTORY DISPLAY

Polar display of amplitude versus phase continuously measured over the duration (SNO ~ SN max) through a TETRA filter.

#### VECTOR ANALYSIS DISPLAYS

Vector error (%), magnitude error (%) and phase error (degrees) measured at symbol points (SNO ~ SN max) through a TETRA filter.

#### Vertical Scaling

Vector error 0.1 %/div to 20 %/div in 1, 2, 5 steps

Phase error  $\pm 0.1$  %/div to  $\pm 20$  %/div in 1, 2, 5 steps

Magnitude error  $\pm 0.1$  %/div to  $\pm 20$  %/div in 1, 2, 5 steps

#### Display Features

Optimized/maximized

Trace re-fresh or accumulate

Limit lines/checking

#### Display Mode

Single/repeat

#### Symbol Markers

Mkr 1 and Mkr 2 plus Mkr Delta, coupled/uncoupled (not available on phase trajectory and constellation displays)

### TETRA SIGNAL GENERATOR

Specification as per platform specification unless otherwise stated

#### TETRA MODULATION

$\pi/4$  DQPSK, 18 k symbols/sec, TETRA filter, (RRC with  $\leq 0.35$ )

#### Level

T/R Port -130 dBm to -40 dBm

Gen Port -130.0 dBm to 0 dBm

#### Accuracy

$\pm 1.0$  dB

#### Vector Error

<3% RMS

<6% peak

#### Residual Carrier Power

<-35 dBc

#### Data TETRA MS mode

Main Control Channel (MCCH) Traffic Channel (TCH/S) containing silence or 1 kHz tone or talk-back, Fast Associated Control Channel (FACCH)

#### Data TETRA MS T1 mode

T1 test signals (in accordance with ETSI EN 300 394-1) T1 type 1 (TCH/7.2), T1 type 2 (SCH/F), T1 type 3 (BSCH + SCH/HD), T1 type 4 (TCH/2.4), T1 type 15 (TCH/S), T1 type 17 (TCH/4.8)

#### Data TETRA BS T1 mode

T1 test signals (in accordance with ETSI EN 300 394-1) T1 type 7 (TCH/7.2), T1 type 8 (SCH/F), T1 type 9 (STCH+ STCH UL), T1 type 10 (TCH/2.4), 18 Frame PRBS, Framed PRBS, Unframed PRBS

#### BS T1 Synchronization Mode

Pulse or Auto

### GENERAL FEATURES

#### LCD DISPLAY Screen Size

6.4 in diagonal

162.6 mm diagonal

#### Active Area

129.6 mm (h) x 97.44 mm (v)

5.1 in. (h) x 3.8 in. (v)

#### Resolution

640 x 480 pixels

#### Disk storage

Internal 30 GByte hard disk available for user storage

### VERSIONS AND ACCESSORIES

When ordering please quote the full ordering number information.

Ordering Number	Description
3920	Analog and Digital Radio Test Platform
<b>Supplied with</b>	
Front/Rear Cover	
2 X Adapter (BNC-F to TNC-M)	
Adapter (N-M to BNC-F)	
3900 Series Operation Manual (CD-ROM)	
Antenna (BNC) (450 MHz)	
Antenna (BNC) (800 MHz)	
Antenna (BNC) (150 MHz)	
3900 Series Getting Started Manual	
Warranty Packet, 2 Year	
2 X Fuse, 3 Amp, 250V	
Power Cord (configuration for use in the UK)	
Power Cord (configuration for use in North America)	
Power Cord (configuration for use in Continental Europe)	
3-Wire (grounded) power cord	
<b>Options</b>	
390XOPT051	Site Monitoring Application
392XOPT053	Digital Multimeter
390XOPT054	IQ Gen Modulation (for IQ Creator waveforms)
390XOPT055	Audio Analyzer
392XOPT058	2.7GHz Frequency Range Extension
390XOPT059	Auto-Test II Analog
390XOPT060	Harmonics & Spurious Measurements
390XOPT061	Tracking Generator
390XOPT110	TETRA MS (Mobile Station Testing)
390XOPT111	TETRA BS (Base Station Testing)
390XOPT112	TETRA DM (Direct Mode Testing)

390XOPT114	TETRA Energy Economy Mode (Requires 390XOPT110)	<b>Accessories for 3920</b>
390XOPT200	P25 Conventional Operation (with DES OFB Type III)	AC24009 DMM Test Leads for use with 392XOPT053. Category 3 rated.
390XOPT201	P25 Trunking Operation VHF/UHF/700/800MHz (Requires 390XOPT200)	AC24010 20 AMP Current Shunt 0.01 Ohm.
390XOPT204	LSM Generate and Receive/Analysis (Requires 390XOPT200)	AC25011 Case, Transit W/Wheels
390XOPT206	P25 Control Channel Logger Option (Requires 390XOPT200)	AC25012 Case, Soft Padded Carrying
390XOPT207	SmartNet™/SmartZone™ Option (Requires 390XOPT200)	AC25013 Kit, 10/20 dB Pads, TNC
390XOPT209	KVL Keyloader Option (Requires 390XOPT200)	AC25014 Scope Probe Kit
390XOPT212	Explicit Mode Trunking (Requires 390XOPT200 and 390XOPT201)	AC25023 Front/Rear Cover
390XOPT218	Auto-Test II for P25 Radio Systems (Requires 390XOPT200)	AC25027 Adapter (BNC-F to TNC-M)
390XOPT240	P25 AES Encryption (Requires 390XOPT200)	AC25029 Accessory Pouch
390XOPT250	Occupied Bandwidth for P25 (Requires 390XOPT200)	AC25036 DC to AC Converter, 12 VDC to 110-120 VAC
390XOPT300	Motorola HPD® Testing Option (Available through Motorola Only)	AC25042 Antenna (BNC) (50 MHz)
390XOPT301	Motorola HPD® Advanced Analysis Package (Available through Motorola Only)	AC25043 Antenna (BNC) (450 MHz)
390XOPT302	Motorola HPD® Testing Suite Combines 390XOPT300 and 390XOPT301	AC25044 Antenna (BNC) (800 MHz)
390XOPT303	Auto-Test II HPD	AC25045 Antenna (BNC) (150 MHz)
390XOPT400	DMR (MOTOTRBO™) ETSI 102-361	AC25046 4 ft Blue Streak BNC-M to TNC-M cable
390XOPT401	Auto-Test for DMR Radio Systems (Requires 390XOPT400)	AC25047 4 ft Blue Streak N-M to N-M cable
390XOPT600	XTS-5000 Auto-Test/Alignment Software (Requires 390XOPT200, 390XOPT218)	AC25049 4 ft Blue Streak BNC-M to N-M cable
390XOPT601	XTS-3000 Auto-Test/Alignment Software (Requires 390XOPT200, 390XOPT218)	AC25050 QMA "Quick Connect" SMA - QMA Jack Adaptor
390XOPT603	TIA/EIA-603 Land Mobile Test Software (Requires 390XOPT059)	AC25053 3 ft Blue Streak N-M to QMA-M quick connect cable
81532	TETRALOG Protocol logging and Analysis software	AC25054 Quick Connect Combo Kit AC25053 + AC25050 Cable and Adaptor
		AC25055 QMA Adapter Kit (Includes 24 assorted adapters)
		AC25056 4 ft Blue Streak QMA to QMA quick connect cable
		AC25057 AC25055 + AC25056 Combo
		AC25059 6 dB / 150 Watt 1.5 GHz Attenuator

**CHINA Beijing**  
Tel: [+86] (10) 6539 1166  
Fax: [+86] (10) 6539 1778

**CHINA Shanghai**  
Tel: [+86] (21) 5109 5128  
Fax: [+86] (21) 6457 7668

**FINLAND**  
Tel: [+358] (9) 2709 5541  
Fax: [+358] (9) 804 2441

**FRANCE**  
Tel: [+33] 1 60 79 96 00  
Fax: [+33] 1 60 77 69 22

**GERMANY**  
Tel: [+49] 8131 2926-0  
Fax: [+49] 8131 2926-130

**HONG KONG**  
Tel: [+852] 2832 7988  
Fax: [+852] 2834 5364

**INDIA**  
Tel: [+91] (0) 80 4115 4501  
Fax: [+91] (0) 80 4115 4502

**JAPAN**  
Tel: [+81] 3 3500 5591  
Fax: [+81] 3 3500 5592

**KOREA**  
Tel: [+82] (2) 3424 2719  
Fax: [+82] (2) 3424 8620

**SCANDINAVIA**  
Tel: [+45] 9614 0045  
Fax: [+45] 9614 0047

**SPAIN**  
Tel: [+34] (91) 640 11 34  
Fax: [+34] (91) 640 06 40

**UK Cambridge**  
Tel: [+44] (0) 1763 262277  
Fax: [+44] (0) 1763 285353

**UK Stevenage**  
Tel: [+44] (0) 1438 742200  
Fax: [+44] (0) 1438 727601  
Freephone: 0800 282388

**USA**  
Tel: [+1] (316) 522 4981  
Fax: [+1] (316) 522 1360  
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2009.

**www.aeroflex.com**  
**info-test@aeroflex.com**

**AEROFLEX**  
A passion for performance.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.